




AIC-7200 Series MPEG-4 Indoor IP Fixed Dome Camera

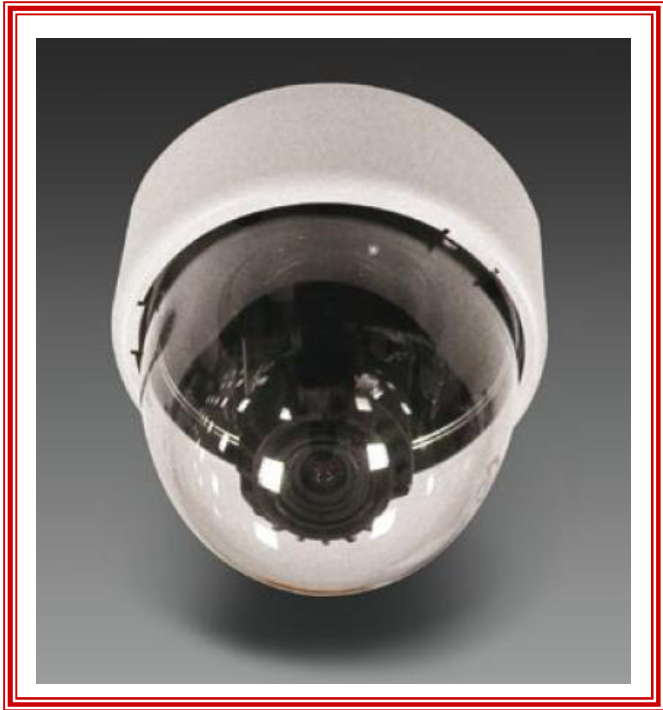


Main Features:

- 1/3" SONY SuperHAD / EXviewHAD CCD with 440K/380K pixels
- Min. 0.15 Lux at F=1.2 (30 IRE, SAGC ON)
- BLC, Auto Iris Control, AWB supported
- Surface, Flush and Wall mount supported
- MPEG-4 ASP compliant compression
- CIF up to Full D1 resolution at 30/25 FPS
- Dual MPEG-4 video stream output via LAN and WAN (PPPoE supported) ports at the same time
- QoS enabled (L3) video streaming
- One-way audio supported
- Power Over Ethernet (IEEE 802.3af) supported (AIC-7201)



- | | |
|------------------------|---------------|
| 1 Analog video output | 4 WAN port |
| 2 Power input | 5 LAN port |
| 3 Digital input/output | 6 Audio input |

DIMENSION DIAGRAM

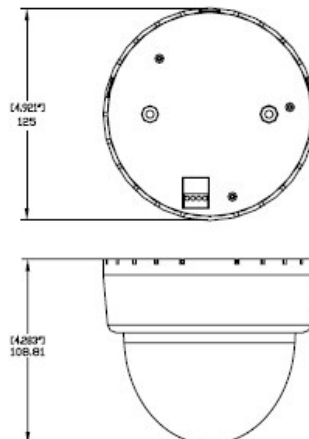

Unit: mm [inch]

Product Specification

		AIC-7200
Image	Device	1/3" SONY Super HAD CCD
	Effective Pixels (HxV)	811 x 508 (NTSC); 795 x 596 (PAL)
	Horizontal Resolution	480 TVL
Min. scene Illumination	Color	0.15 Lux at F1.2 (30 IRE, SAGC ON)
Lens	Focal Length	3.8 ~ 9.5 mm
	Lens Mount	Board lens
Camera Angle Adjustment	X (Panning)	± 180°
	Y (Tilting)	90°
Synchronization	Sync. System	Internal / Line-lock
Functions	Motion Detection	Yes (3 windows)
	Electronic Shutter	1/60 ~ 1/100,000 sec. (NTSC); 1/50 ~ 1/100,000 sec. (PAL)
	BLC	On / Off (Switchable)
	AGC	On / Off (Switchable)
	White Balance	AWB / PWB (Switchable)
	Flickerless	On / Off (Switchable)
	Auto Iris Control	Video / DC (Switchable)
S/N Ratio	S/N Ratio	Better than 50 dB
Video (Compression)	Compression	MPEG-4 ASP Compliant
	Picture Resolution	Full D1, CIF, QCIF
	Bit Rate	28 K ~ 3 M bps
	Multi-stream	Up to 4 Configurable frame rate/bit rate for preview and recording
Video Output	Composite Output	CVBS, 1.0Vp-p with 75 Ω loading, BNC connector
Audio Input	Compression	8 kHz, Mono, PCM
	Audio Line Input	Unbalanced, 1.0 Vpp, 1Vrms, 3.5 mm Jack
Alarm	Input	1, TTL, terminal block
	Output	1, TTL, terminal block
External I/O	Reset Button	Factory default
	LED	System status
Network	LAN Port	Ethernet(10/100 Base-T), RJ-45 connector
	WAN Port	Ethernet(10/100 Base-T), RJ-45 connector
	Protocol	TCP, UDP, RTP, RTSP
Software	Web Browser	Microsoft Internet Explorer 6.0 or above
	Security	Password Protection: configured by the administrator
Operating	Temperature	5 ~ 50 °C (40 ~ 122 °F)
Power Requirement / Consumption		DC 12 V ±10%, 7.4W
Physical	Dimensions (ØxH)	125 mm x 108.81 mm (4.92" x 4.28")
	Weight	1,020 g (2.25 lb)