

# Control Keyboard


2 Axis / 3 Axis



AKB200 2 Axis RS485 Control Keyboard



AKB300 3 Axis RS485 Control Keyboard

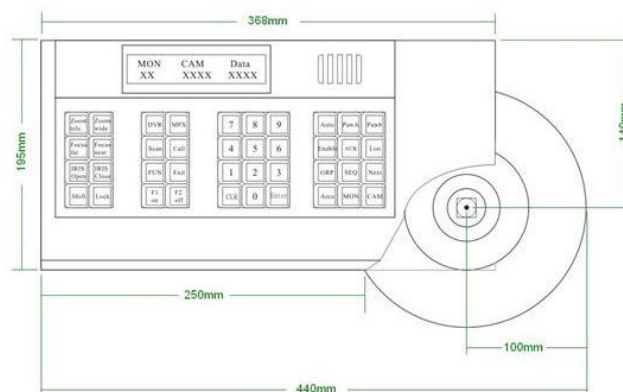

Mechanical Drawing

# AKB200/AKB300 General Specification

---

## Features:

---

- \*\* Joystick Control of Pan/Tilt/Zoom Functions
- \*\* Preset Position and Pattern Control
- \*\* Auto/Random/Frame Control
- \*\* Capable of Interfacing RS485 and RS232 Formats
- \*\* Fully Programmable Preset Tour
- \*\* Compact LCD with Real Time Alarm Display
- \*\* Controls up to 1024 Speed Domes through One

## Electric Performance

---

- \*\* Input Voltage: 12VDC (via 120/230VAC, 50/60Hz transformer)
- \*\* Power Consumption: 10 Watt
- \*\* Communication: RS485
- \*\* Communication Distance: 4000 feet (1219 m) by 24 AWG Cable
- \*\* Fixed Current: 1 amp.

Working Temperature: 0°C to 49°C

---

Transmit Weight: 9Lb(3.01kg)

---

## Ordering Information

AKB200                      2 Axis Control Keyboard

---

AKB300                      3 Axis Control Keyboard

---